

GLOBE 250 CLASSIC


SMALL SIZE

Ø 250 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV approved, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Globo Ø 250 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di **lampadine LED a filamento** adatte ad uso in ambiente esterno, approvate TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



G25.131

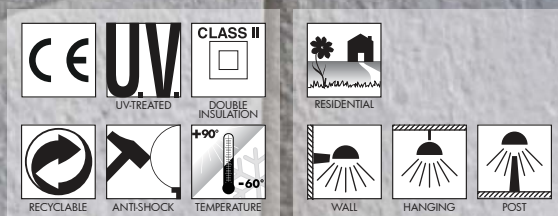




GLOBE 250 CLASSIC - COMPONENTS

IP55



Ø 250 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 250 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

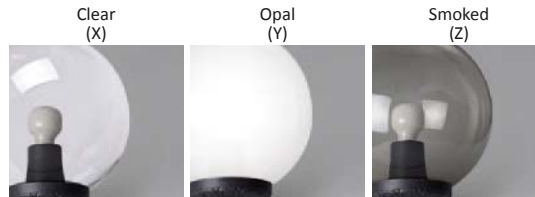

GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.

GLOBE 250 CLASSIC

G25.B25 *



Dimensions and weight

Height: 260 mm
Diameter: 250 mm
Weight: 0,9 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze


Diffuser PMMA:

Clear Opal Smoked

E27 VERSIONS



Globe supplied with **E27** base. Provided as an option with TÜV approved, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.

E27 (GLS-CFL-LED)	max 60W max 160 mm			*ADD. SUFFIX .E27
	 FILAMENT LED LAMP	6 W	800 Lm	
	8 W	1000 Lm	2700 K	.M1R
	12 W	1500 Lm	2700 K	.N1R

6W
8W
12W = 60W
75W
100W incandescent

SAVE 90%



LED LAMPS



More technical details about TÜV approved Fumagalli LED Lamps on page 468.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PHOTOMETRIC DATA SAMPLE

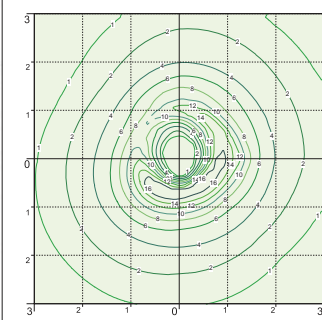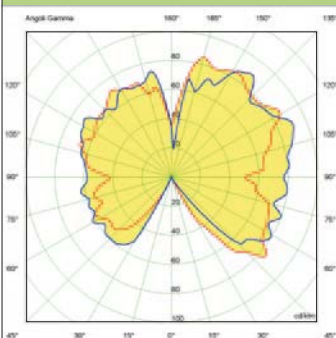

GLOBE 250 CLASSIC clear with Fumagalli Filament Led Lamp 6W.

POST height 1mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

GLOBE 250 CLASSIC

SMALL SIZE

BULKHEAD

FLOODLIGHT

IN-GROUND

BRICKLIGHT

BOLLARDS

GARDEN


URBAN CLASSIC

URBAN MODERN


HIGH-BAY

POST

LAMPS

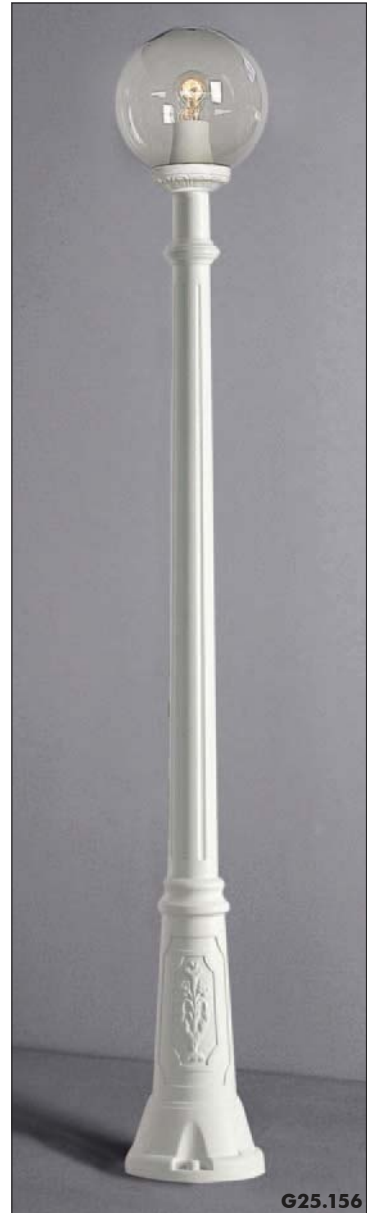

MADE IN ITALY

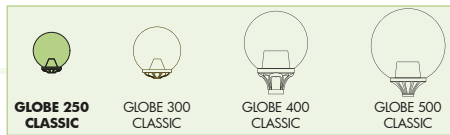

MIKROLOT/G250
G25.110

Pcs 4
Kg 6,2
mc 0,0931

Ø 130

MIZAR/G250
G25.151 resin

Pcs 4
Kg 11,7
mc 0,1456

Ø 150

IAFET.R/G250
G25.162 resin

Pcs 2
Kg 6,9
mc 0,092

Ø 190

ALOE'.R/G250
G25.163 resin

Pcs 2
Kg 7
mc 0,122

Ø 190

GLOBE 250 CLASSIC
G25.B25

Pcs 2
Kg 1,87
mc 0,025

Ø 250
Ø 60

BISSO/G250
G25.131

Pcs 4
Kg 6,6
mc 0,0931

Ø 250
Ø 250

PORPORA/G250
G25.141

Pcs 2
Kg 6,7
mc 0,0931

Ø 250
Ø 250

GIGI BISSO/G250 3L
G25.156.S30

Pcs 2
Kg 25,4
mc 0,31

Ø 250
Ø 250
Ø 250

RICU BISSO/G250 3L
G25.157.S30

Pcs 2
Kg 27,5
mc 0,339

Ø 250
Ø 250
Ø 250

ARTU'/G250
G25.158

Pcs 2
Kg 16,4
mc 0,186

Ø 245

GIGI/G250
G25.156

Pcs 2
Kg 20
mc 0,217

Ø 245

GIGI BISSO/G250 2L
G25.156.S20

Pcs 2
Kg 23,7
mc 0,27

Ø 250
Ø 250

RICU BISSO/G250 2L
G25.157.S20

Pcs 2
Kg 24,8
mc 0,304

Ø 250
Ø 250

SICHEM/G250
G25.120

Pcs 4
Kg 5,7
mc 0,0931

Ø 250

BULKHEAD
FLOODLIGHT
IN-GROUND
BRICKLIGHT
BOLLARDS
GARDEN
URBAN CLASSIC
URBAN MODERN
HIGH-BAY
POST
LAMPS