#### LED REFLECTORS

## **GX53**


# Integral LED cabinet lighting with an incredible slim profile

The MEGAMAN® LED GX53 series has an ultra slim profile, which provides an innovative solution for slim surface-mounted luminaires and recessed fittings that have long been haunted by blazing-heat halogens, causing overheating, discoloration and deformation to furniture and display items.

#### **Product Features**

- Integral LED cabinet lighting with GX53 lamp base
- Ultra slim profile: the lamp height is only 24mm, up to 32mm
- High luminous efficacy of up to 74lm/W
- 100% to 10% linear dimming version available#
- High colour temperature consistency
- High luminous maintenance: rated lumen maintenance life of 70 (L70) at up to 50,000 hours
- High colour rendering of up to Ra85
- Operating temperature: -30°C to +40°C



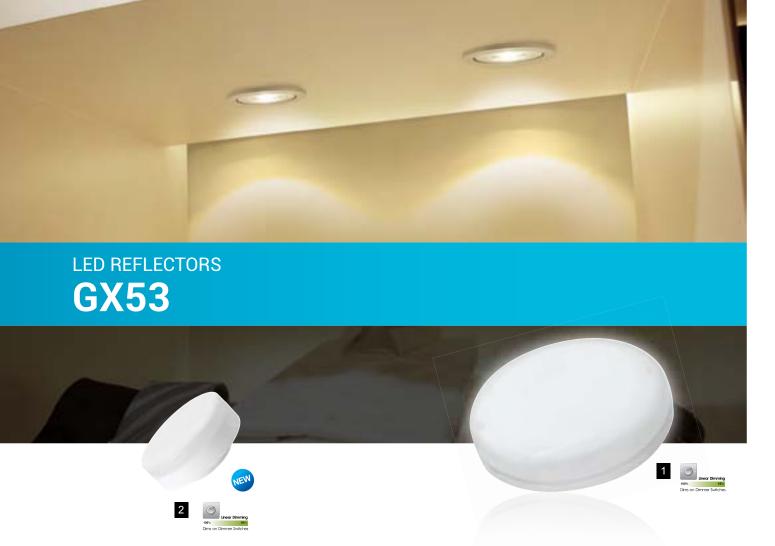

## 220-240V | Line Voltage

Product Code		Wattage (W)	Luminous Flux (lm)	CRI	Rated Life (hrs)	Diameter (mm)	Height (mm)	Weight (g)	Dimmable	Energy Label	Product Photo
Economy Series	Economy Series										
LR2203.5-GX53-2800K-230V		3.5	220	80	15000	75	24	56	No	A+	1
LR2203.5-GX53-4000K-230V		3.5	220	80	15000	75	24	56	No	A+	1
LR2205-GX53-2800K-230V		5	300	80	15000	75	24	59	No	A+	1
LR2205-GX53-4000K-230V		5	300	80	15000	75	24	59	No	A+	1
LR3307-GX53-2800K-230V	9	7	520	80	15000	75	32	91	No	A+	2
LR3307-GX53-4000K-230V	9	7	520	80	15000	75	32	91	No	A+	2
Smart Series											
LR2205d-GX53-2800K-230V		5	300	80	25000	75	24	57	100-10%#	A+	1
LR2205d-GX53-4000K-230V		5	300	80	25000	75	24	57	100-10%#	A+	1
LR3307d-GX53-2800K-230V	9	7	480	80	25000	75	32	99	100-10%#	A+	2
LR3307d-GX53-4000K-230V	9	7	480	80	25000	75	32	99	100-10%#	A+	2

<sup>\*</sup> Capable of linear dimming from 100% to 10% when working with most conventional dimmers for incandescent lamps or halogens; please refer to the compatible dimmer list at www.megaman.cc/user-guide for further details.


### LED REFLECTORS




## 220-240V | Line Voltage


Product Code	Wattage (W)	Max. Luminous Intensity (cd)	Beam Angle (°)	Luminous Flux (lm)	CRI	Rated Life (hrs)	Diameter (mm)	Height (mm)	Weight (g)	Energy Label
Professional Series										
LR1305-30D-GX53-2800K-230V	5	850	30	350	82	30000	75	25	82	A+
LR1305-30D-GX53-4000K-230V	5	850	30	350	85	30000	75	25	82	A+
LR1305-60D-GX53-2800K-230V	5	350	60	350	82	30000	75	25	82	A+
LR1305-60D-GX53-4000K-230V	5	350	60	350	85	30000	75	25	82	A+







LR1305-60D



m	Lux	Ø cm				
0.5	1400	58				
1	350	115				
1.5	156	173				
2	88	231				
Beam angle = 60°						

