

CECCHI**RECTANGULAR SHAPE**

fumagalli®
 since 1973

Rectangular bulkhead lamp made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Coloured backlit version available. Suitable for wall and ceiling installation. Insulation class II, Protection rating IP66.


CECCHI
 1H3.000

Plafoniera rettangolare realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile anche nella versione con retroilluminazione colorata. Idonea per il montaggio a parete e a soffitto. Classe di isolamento II, grado di protezione IP66.

1H3.000:CL1



BACKLIT COLOURS

Polycarbonate base available in 5 different colours to create a coloured effect on wall or ceiling, for an elegant and customized ambience.



CECCHI



CECCHI COMPONENTS - E27 VERSION



COVER made in shockproof resin material UV rays stabilized.

COVER in resina antiurto stabilizzata ai raggi UV.

IP 66

Opal **DIFFUSER** of UV stabilized polymethylmethacrylate (PMMA), one piece only, provided with high quality silicone rubber gasket.

DIFFUSORE opale in un pezzo unico realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, completo di guarnizione in gomma ad alta qualità.

Highly heat resistant **REFLECTIVE PLATE** made by shockproof resin material, UV rays stabilized.

PIATTO RIFLETTENTE ad alta resistenza al calore in resina antiurto stabilizzata ai raggi UV.

BASE made in shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided with E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27.

Dimensions and weight

Width: 338 mm
Height: 245 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS

		Ref. Code
	E27 MAX 180 mm	.E27
	9W LED	.L11
	9W LED WITH SENSOR	.LS1
	G24d-3	.03G
	GR8	.04G
	G23	.01G
	2x G23	.02G

ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


DAYLIGHT AND MOTION SENSOR



DETECTION ANGLE
30° - 150°
FIELDS OF DETECTION
1 - 5 MT
(adjustable)

Sensor operating voltage:
220-240V
(120V version available on demand).

CECCHI COMPONENTS - LED VERSION

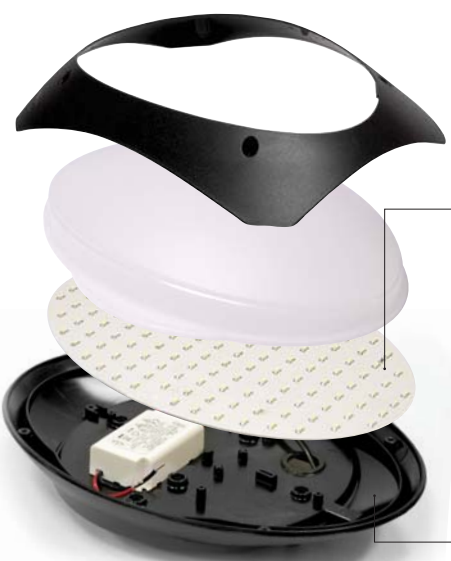


PRINTED CIRCUIT BOARD with oval shape provided with 150 LED x 6 lm each to allow a uniform light distribution. Total luminous flux of 900 lm.

CIRCUITO STAMPATO ovale con alloggiati 150 LED da 6 lm ciascuno per permettere un'uniforme distribuzione della luce. Flusso luminoso totale di 900 lm.

BASE made in shockproof resin material, UV rays stabilized, provided with 150mA constant current driver. Input: 100-240V, 50-60Hz

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, completa di alimentatore 150mA a corrente costante. Input: 100-240V, 50-60Hz

IP 66



LED

POWER
9W

LIGHT SOURCE
150 LED
x 6 lm

PCB LUMINOUS FLUX
900 lm

COLOR TEMP. KELVIN
4000K

VOLTAGE RANGE
100-240v
50/60 Hz

LIFETIME
50.000
hours

VIEW ANGLE
120°

LED OPERATIVE TEMPERATURE
+85°C
-40°C



