


## PINO Batten (Integrated)




White



Class  
II

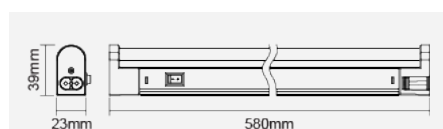

Integrated LED Luminaire  
F29000SM-3000K

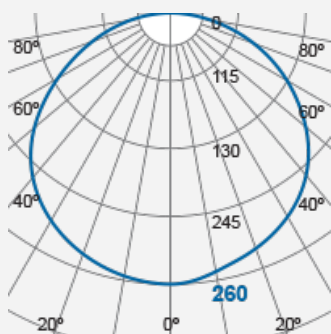

m	Lux	Ø cm
0.5	1040	173
1	260	346
1.5	116	520
2	65	693

Beam angle = 120°

Product Code:

**F29000SM**

### Electrical Data

Voltage (V)	220-240V
-------------	----------

### Product Data

Product Wattage (W)	11
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH13)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Weight (g)	153
Application	Office, Display Shelves, Light Troughs, Shops and Boutiques, Wall Lighting

### Performance Data


Luminous Flux (lm)	1000 [3000K], 1100 [4000K]
Luminous Efficacy (lm/W)	91 [3000K], 100 [4000K]
Rated Life (hrs)	25000
IP Rating	IP20

### Product Dimensions

Length (mm)	580
Width (mm)	23
Height (mm)	39

Remarks: Accessory: LA8002 Power Cord LA8003 150mm Patch Cord LA8004 Angle Joint LA8005 Mounting Clips (Comes with the MEGAMAN® PINO)

F29000SM-4000K



m	Lux	Ø cm
0.5	1120	173
1	280	346
1.5	124	520
2	70	693
Beam angle = 120°		