


DINO Waterproof Batten (Integrated)




Silver

IP66	IK08	Class II
------	------	----------

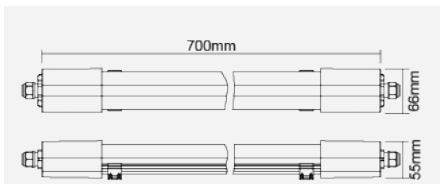

Integrated LED Luminaire
F50000SM



Product Code:

F50000SM

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	19.5
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Colour	Silver (SV16)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Weight (g)	663
Application	Car parks, Underground Areas, Warehouses, Workshops
Performance Data	
Luminous Flux (lm)	1750 [3000K], 1800 [4000K]
Luminous Efficacy (lm/W)	90 [3000K], 92 [4000K]
Rated Life (hrs)	50000
IP Rating	IP66
Product Dimensions	
Length (mm)	700
Width (mm)	66
Height (mm)	55
Remarks: LA8012 Security Clip	

m	Lux	Ø cm
0.5	1640	173
1	410	346
1.5	182	520
2	103	693

Beam angle = 120°