


Dim-to-Warm-PAR16 6W WFL GU10 2800K

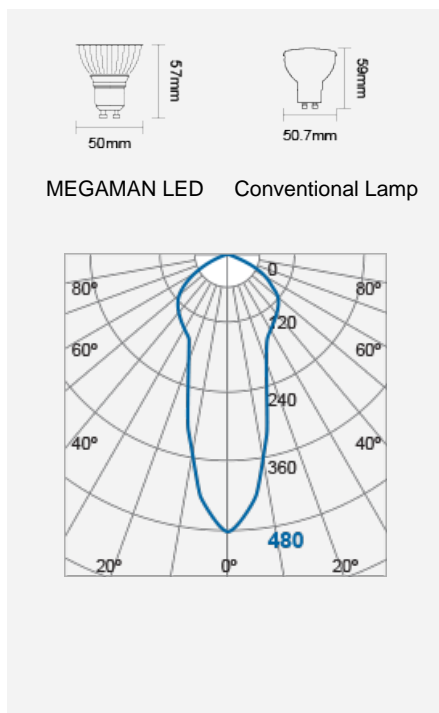

Product Code:

LR5006wDG-WFL-GU10-2800K-230V

Electrical Data

Voltage (V)	220-240V
Frequency (Hz)	50/60
Power Factor	>0.5
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light

Product Data

Lamp Base	GU10
Product Wattage (W)	6
Reflector	PAR16
Beam Angle (°)	WFL (35)
Colour Temperature (K)	Warmwhite (2800K)
Colour Render Index (Ra)	Ra82
Colour Consistency (SDCM)	>6
Dimmable	100-5%
Energy Label	A
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1000000
Mercury Content (mg)	N/A
Weight (g)	75
Application	Hospitality, Residential

Performance Data


Max. Luminous Intensity (cd)	480
Total Luminous Flux (lm)	380
Luminous Flux in 90 ° cone (lm)	280
Rated Life (hrs)	25000
Lumen Maintenance at the End of Lamp Life (%)	90

Product Dimensions

Diameter (mm)	50
Length (mm)	57

m	Lux	Ø cm
0.5	1920	32
1	480	63
1.5	213	95
2	120	126

Beam angle = 35°



Remarks:

Colour Temperature changes from 2800K to 1800K when dimmed from 100% to 10%. The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.