


# DINO Waterproof Batten (Integrated) - High Output




Silver

IP66	IK08	Class II
------	------	----------

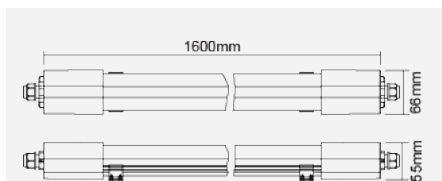


Integrated LED Luminaire  
F50300SM

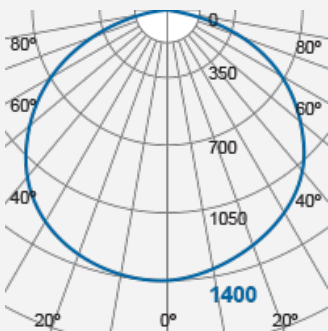

Product Code:

**F50300SM**

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	63
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Colour	Silver (SV16)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Weight (g)	1283
Application	Car parks, Underground Areas, Warehouses, Workshops
Performance Data	
Luminous Flux (lm)	6300 [3000K], 6500 [4000K]
Luminous Efficacy (lm/W)	100 [3000K], 103 [4000K]
Rated Life (hrs)	50000
IP Rating	IP66
Product Dimensions	
Length (mm)	1652
Width (mm)	66
Height (mm)	55
Remarks: LA8012 Security Clip	



m	Lux	Ø cm
0.5	5600	173
1	1400	346
1.5	622	520
2	350	693

Beam angle = 120°