

# MR16 4.7W WFL GU5.3 2800K



Product Code:

**ER4504.7LN-WFL-GU5.3-2800K-12V**

### Electrical Data

Voltage (V)	AC 12V
Input Current (mA)	600
Power Factor	>0.6
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light

### Product Data


Lamp Base	GU5.3
Product Wattage (W)	4.7
Equivalent Wattage (W)	35
Reflector	PAR16
Beam Angle ( ° )	WFL (36)
Colour Temperature (K)	Warmwhite (2800K)
Colour Render Index (Ra)	Ra80
Colour Consistency (SDCM)	6
Dimmable	No
Energy Label	A+
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1,000,000
Mercury Content (mg)	N/A
Weight (g)	49
Application	Hospitality, Residential


### Performance Data

Max. Luminous Intensity (cd)	650
Total Luminous Flux (lm)	400
Luminous Flux in 90 ° cone (lm)	345
Rated Life (hrs)	15000
Lumen Maintenance at the End of Lamp Life (%)	70

### Product Dimensions

Diameter (mm)	50
---------------	----

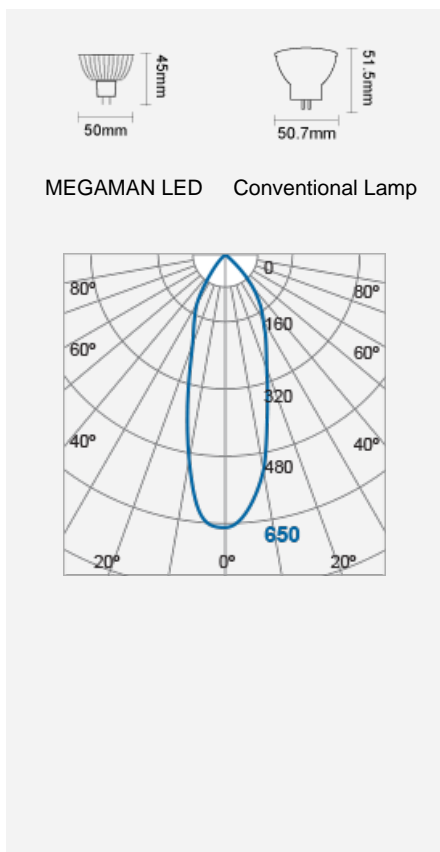

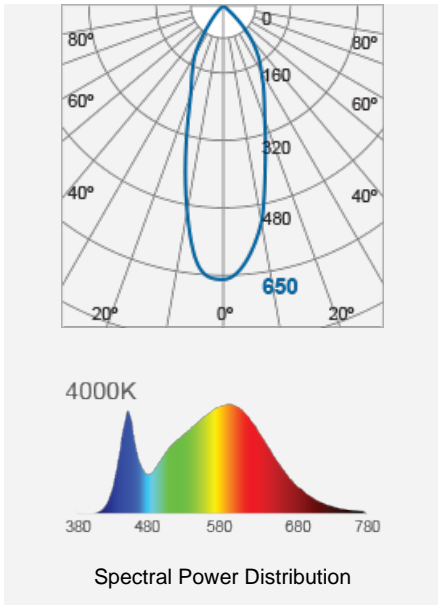

Length (mm)	45
Remarks: The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.	