



## **TONO Batten (Integrated)**









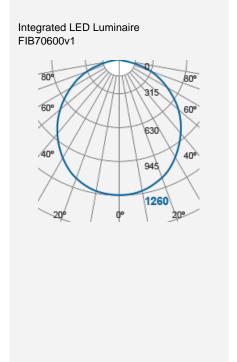

Product Code:

## FIB70600v1

Electrical Data		
Voltage (V)	220-240V	
Product Data	220 2 10 1	
Product Wattage (W)	38	
Beam Angle (°)	110	
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6500K)	
Colour Render Index (Ra)	>Ra80	
Colour	White (WH12)	
Materials	Polycarbonate	
Protection Class	Class II	
Dimmable	No	
Operating Temperature	-30 ° C to +40 ° C	
Weight (g)	411	
Application	Cabinets, Corridors and Staircases, Factories, Residential, Warehouses	
Performance Data		
Luminous Flux (lm)	3600	
Luminous Efficacy (lm/W)	95	
Rated Life (hrs)	35000	
IP Rating	IP20	
Product Dimensions		
Length (mm)	1200	
Width (mm)	75	
Height (mm)	24	

Product Code: FIB70600v1



m	Lux	Ø cm
0.5	5040	143
_1_/	1260	286
1.5	560	428
2	315	571
Beam angl	e = 110°	