


Hybrid Reflector-AR111 11W GU10 45D 2800K U-DIM







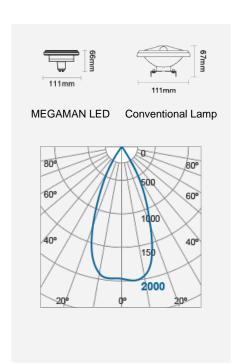


Product Code:

LR6711dHR-75H45D-GU10-2800K-230V

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light
Product Data	
Lamp Base	GU10
Product Wattage (W)	11
Reflector	AR111
Beam Angle (°)	45
Colour Temperature (K)	Warmwhite (2800K)
Colour Render Index (Ra)	Ra82
Colour Consistency (SDCM)	6
Dimmable	100-5%
Energy Label	A+
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1,000,000
Mercury Content (mg)	N/A
Weight (g)	190
Application	Retail, Hospitality
Performance Data	
Max. Luminous Intensity (cd)	2000
Total Luminous Flux (lm)	900
Luminous Flux in 90 ° cone (lm)	850
Rated Life (hrs)	40000
Lumen Maintenance at the End of Lamp Life (%)	85
Product Dimensions	
Diameter (mm)	111
Length (mm)	66

Product Code: LR6711dHR-75H45D-GU10-2800K-230V





Remarks: The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.

Technologies





Compatible with the widest range of existing dimmers, whether they are leading-edge or trailing edge dimmers, with enhanced dimming range of 100% to 5%.

Being able to adjust your LEDs with wide selection of dimming range from 100% to 10% or 20% for perfect atmosphere and/or scene setting – warm and bright, dim and cozy.