

# Hybrid Reflector-AR111 11W GU10 45D 4000K U-DIM



Product Code:

LR6711dHR-75H45D-GU10-4000K-230V

## Electrical Data

Voltage (V)	220-240V
Power Factor	>0.9
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light

## Product Data


Lamp Base	GU10
Product Wattage (W)	11
Reflector	AR111
Beam Angle ( ° )	45
Colour Temperature (K)	Coolwhite (4000K)
Colour Render Index (Ra)	Ra85
Colour Consistency (SDCM)	6
Dimmable	100-5%
Energy Label	A+
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1,000,000
Mercury Content (mg)	N/A
Weight (g)	190
Application	Retail, Hospitality

## Performance Data

Max. Luminous Intensity (cd)	2000
Total Luminous Flux (lm)	900
Luminous Flux in 90 ° cone (lm)	850
Rated Life (hrs)	40000
Lumen Maintenance at the End of Lamp Life (%)	85

## Product Dimensions

Diameter (mm)	111
Length (mm)	66

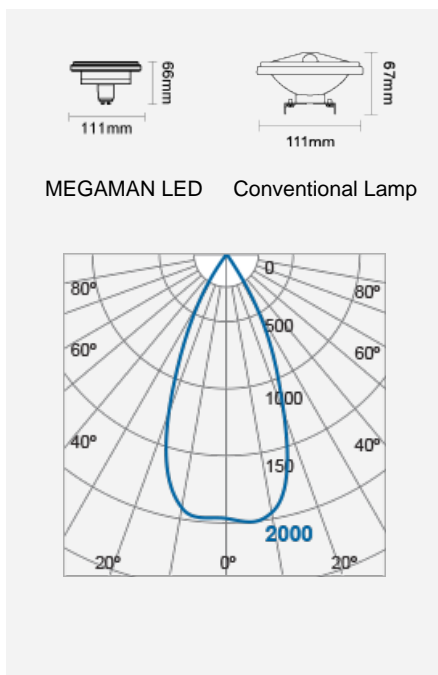


Product Code: LR6711dHR-75H45D-GU10-4000K-230V

MEGAMAN® 2005-2017. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

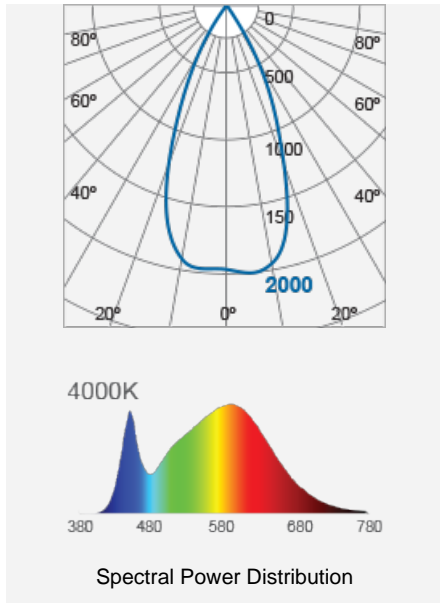

Remarks: The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.

### Technologies



Compatible with the widest range of existing dimmers, whether they are leading-edge or trailing edge dimmers, with enhanced dimming range of 100% to 5%.



Being able to adjust your LEDs with wide selection of dimming range from 100% to 10% or 20% for perfect atmosphere and/or scene setting – warm and bright, dim and cozy.