


PAR16 5.6W GU10 WFL 2800K

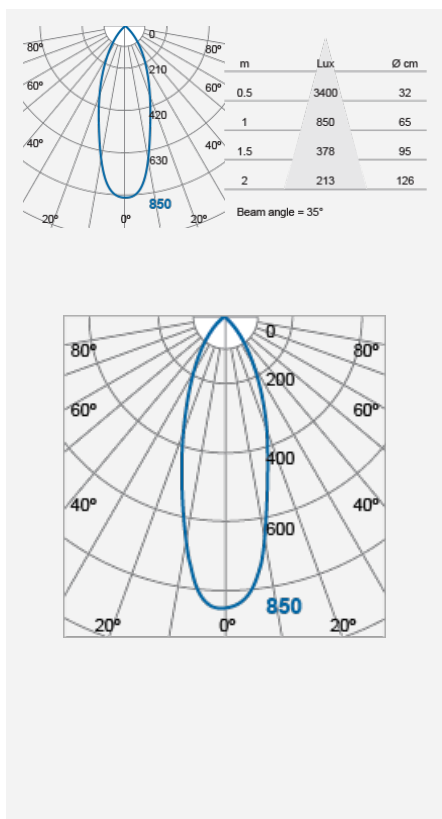

Product Code:

LR5705.6LN-WFL-GU10-2800K-230V

Electrical Data

Voltage (V)	220-240V
Power Factor	>0.5
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light

Product Data

Lamp Base	GU10
Product Wattage (W)	5.6
Equivalent Wattage (W)	>50
Reflector	PAR16
Beam Angle (°)	WFL (35)
Colour Temperature (K)	Warmwhite (2800K)
Colour Render Index (Ra)	Ra80
Colour Consistency (SDCM)	6
Dimmable	No
Energy Label	A+
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1,000,000
Mercury Content (mg)	N/A
Weight (g)	43
Application	Hospitality, Residential

Performance Data

Max. Luminous Intensity (cd)	850
Total Luminous Flux (lm)	500
Luminous Flux in 90 ° cone (lm)	430
Rated Life (hrs)	15000
Lumen Maintenance at the End of Lamp Life (%)	70

Product Dimensions

Diameter (mm)	50
---------------	----


Product Code: LR5705.6LN-WFL-GU10-2800K-230V

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

m	Lux	Ø cm
0.5	3400	32
1	850	65
1.5	378	95
2	213	126
Beam angle = 35°		



Length (mm)	53
-------------	----

Remarks: The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.