

FTA70800v0-db



White



Silver



Black




25°



45°



330°




90°



IP20



Class II

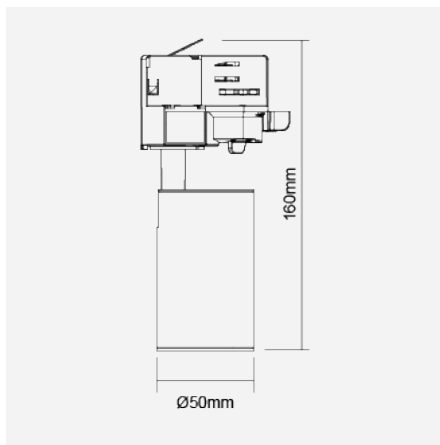

Product Code:

FTA70800v0-db

Electrical Data

Voltage (V)	220-240V
Power Factor	>0.9

Product Data

Product Wattage (W)	24
Beam Angle (°)	25 ° , 45 °
Rotating Angle (°)	330
Tilting Angle (°)	90
Colour Render Index (Ra)	Ra80
Colour Consistency (SDCM)	3
Colour	White (WH12), Silver (SV12), Black (BK12)
Materials	Aluminium
Operating Temperature	-30 ° C to +40 ° C
Weight (g)	480
Application	Hotels, Museums, Restaurants, Shop Lighting, Showrooms

Performance Data

Max. Luminous Intensity (cd)	10700 [25 °], 4300 [45 °]
Luminous Flux (lm)	2100 [3000K], 2200 [4000K]
Luminous Efficacy (lm/W)	88 [3000K], 92 [4000k]
Rated Life (hrs)	50000 hrs at L70 B50 at Ta 25 ° C

Product Dimensions

Diameter (mm)	65
Height (mm)	198

Remarks: Accessories:

LA10098 Honeycomb louvre



Product Code: FTA70800v0-db

MEGAMAN® 2005-2020. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

Technologies




The innovative Dual Beam Technology empowers commercial users to have two beam angles in one single lamp/luminaire. It offers high flexibility of changing the beam angles onsite for different application requirements.

Integrated LED Luminaire
FTA70800v0-db-25 °

m	Lux	Ø cm
0.5	42800	22
1	10700	44
1.5	4756	67
2	2675	89

Beam angle = 25°



FTA70800v0-db-45 °

m	Lux	Ø cm
0.5	17200	41
1	4300	83
1.5	1911	124
2	1075	166

Beam angle = 45°

