

NERO Waterproof Batten (Integrated) - Permanent Live Option




Silver

IP66

IK08

Class
II

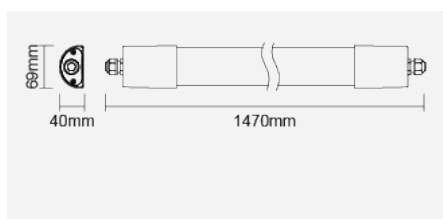

Product Code:

FOB70500v1-pl

Electrical Data

Voltage (V)	220-240V
Power Factor	>0.9

Product Data

Product Wattage (W)	46
Beam Angle (°)	110
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K)
Colour Render Index (Ra)	Ra80
Colour Consistency (SDCM)	6
Colour	Silver (SV16)
Materials	Polycarbonate
Protection Class	Class
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Weight (g)	726
Application	Car parks, Underground Areas, Warehouses, Workshops

Performance Data

Max. Luminous Intensity (cd)	1250
Luminous Flux (lm)	5000
Luminous Efficacy (lm/W)	109
Rated Life (hrs)	50000hrs at L70 B50 at Ta 25 ° C

Product Dimensions

Length (mm)	1470
Width (mm)	69
Height (mm)	40

Product Code: FOB70500v1-pl

MEGAMAN® 2005-2018. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

Page 1 of 1