

## **Step** Dimming





### Step Dimming

### LED lamp with a 'built-in dimmer'

LED lamps provide a convenient, simple and instant way to adjust the brightness level to 100%, 60% and 20% with the use of any standard (ON/OFF) switch.

This new product range is designed to offer you the flexibility to create the perfect mood for any occasion. The LED lamps available in this range include the Candle, Classic, PAR16 reflector, R50 reflector, R63 reflector and GX53, they offer excellent light output for different household and commercial applications. With the step dimming technology embedded in the LED lamp, users can enjoy reduced electricity costs when the lamp is dimmed.

### Three adjustable brightness levels: 100%, 60% and 20%







100%

60%

### Dim the LED lamp with any ordinary light switch



A convenient and simple way to create the perfect mood for any occasion

### Full range to cater for different applications



# **Step** Dimming





### PAR16 / Smart Series

Step Dimming











Step Dimming



				280	00K   Ra82 4000K   R	220-240°	V 25000 hrs 50	mm GU10
Model No.	Wattage (W)	Max. Luminous Intensity (cd)	Beam Angle (°)	Total Luminous Flux (lm)	Luminous Flux in 90° cone (lm)	Length (mm)	Dimmable	Energy Label
LR2105sDG-WFL	5	350	40	250	220	57	100%, 60%, 20%	Α
LR2106sDG-WFL	6	480	40	360	265	57	100%, 60%, 20%	Α







m	Lux	Ø cm						
0.5	1920	36						
1	480	73						
1.5	213	109						
2	120	146						
Beam angle = 40°								



### R50 & R63 / Samrt Series

Step Dimming







**Step Dimming** 



Lamp Type	Model No.	Lamp Base	Wattage (W)	Max. Luminous Intensity (cd)	Beam Angle (°)	Total Luminous Flux (lm)	Luminous Flux in 90° cone (lm)	Luminous Flux in 120° cone (lm)	Diameter (mm)	Length (mm)	Dimmable	Energy Label	Product Photo
R50	LR2606s-SWFL	E14	6	190	90	400	250	340	50	87	100%, 60%, 20%	A+	1
R63	I R2408s-SWFI	F27	8	230	90	600	350	520	63	104	100%, 60%, 20%	Δ+	2








m	Lux	Ø cm							
0.5	920	100							
1_	230	200							
1.5	102	300							
2	58	400							
Beam a	Beam angle = 90°								

# LED by MEGAMAN®

### **Step** Dimming

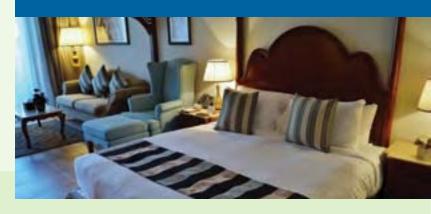



**CANDLE & CLASSIC / Smart Series** 

**Step Dimming** 











Lamp Type	Equivalent Incandescent Lamp Wattage (W)	Model No.	Lamp Base	Wattage (W)	Total Luminous Flux (lm)	Diameter (mm)	Length (mm)	Dimmable	Energy Label	Product Photo
Candle	40	LC1106s	E14	6	470	40	106	100%, 60%, 20%	A+	1
P45	40	LG5206s	E14	6	470	45	80	100%, 60%, 20%	A+	2
A55	40	LG2206s	E27	6	470	55	104	100%, 60%, 20%	A+	3
A60	60	LG2509.5s	E27	9.5	810	60	115	100%, 60%, 20%	A+	4
A65	75	LG2311s	E27	11	1055	65	125	100%, 60%, 20%	A+	5

E27 lamp base is available for Candle and Classic P45



**GX53** / Smart Series

Step Dimming











**Step Dimming** 

rs	75mm	GX53

Model No.	Wattage (W)	Total Luminous Flux (lm)	Length (mm)	Dimmable	Energy Label	Product Photo
LR2205s	5	300	24	100, 60%, 20%	A+	1
LR3307s	7	520	32	100, 60%, 20%	A+	2

